


REVISIONS		
NO.	DESCRIPTION	DATE BY
1	1.6 WAS 1.3	3/2/93 TS
2	Non-critical dimensions for reference only	12/20/95 SDC

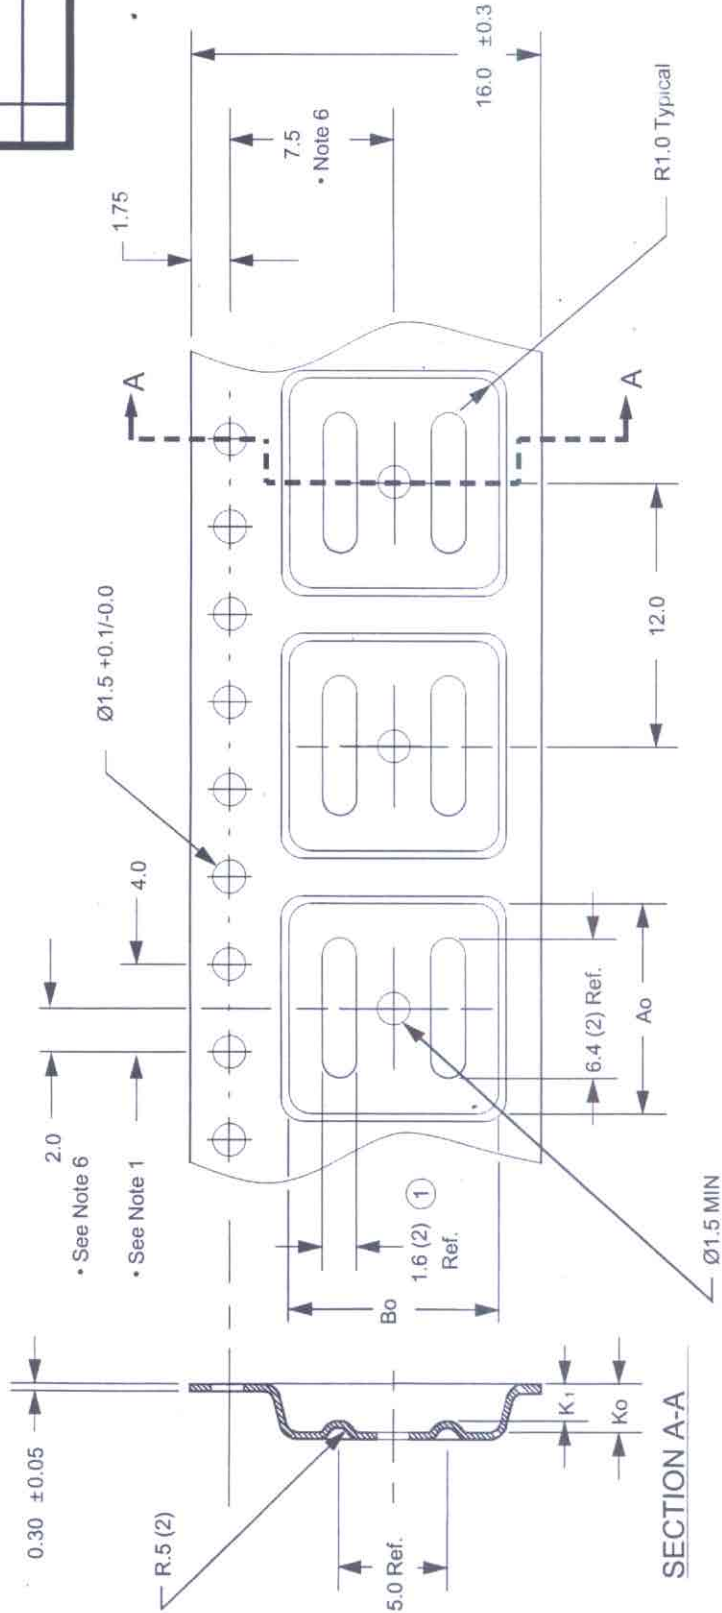

- All Dimensions in Millimeters -

- Ao = 9.6 mm
- Bo = 9.6 mm
- Ko = 2.2 mm
- K1 = 1.6 mm

± 0.2

- Notes:
1. 10 sprocket hole pitch cumulative tolerance
 2. Camber not to exceed 1mm in 100mm
 3. Material: Black Conductive Advantek Polystyrene
 4. Ao and Bo measured on a plane 0.3mm above the bottom of the pocket
 5. Ko measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
 6. Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.

TOLERANCES (EXCEPT AS NOTED)	Advantek Part Number Q07X07-A	SCALE 3 : 1	MATERIAL see Note 3
DECIMAL ± 0.1	DRAWN BY T.S./SDC	DATE 3/1/93	REV 2
FRACTIONAL	REFERENCE NO.	DRAWING NO. A0301-93-1	
ANGULAR			